

50x50x15 mm

2.7~5.4 CFM




■ Specification


	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● VAPO	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
MF50151VX-1B000-A99	●	12	155	1.86	6200	5.4	0.97	42.2	30.0	1
MF50151V1-1B000-A99	●	12	95	1.14	5200	4.5	0.67	39.6	30.0	2
MF50151V2-1B000-A99	●	12	45	0.54	4200	3.5	0.40	32.6	30.0	3
MF50151V3-1B000-A99	●	12	30	0.36	3200	2.7	0.18	23.2	30.0	4

■ Function R Type : F99 / F Type : G99

■ Air Flow-Static Pressure Characteristics

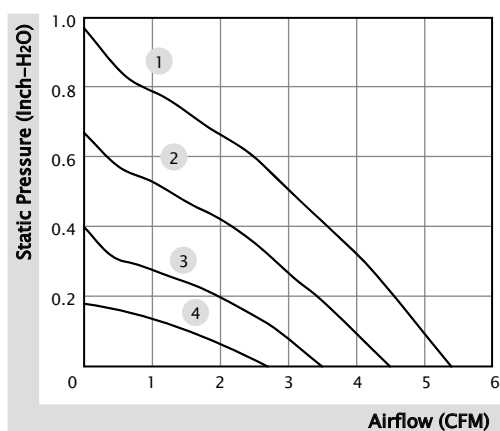


■ External dimensions(mm)

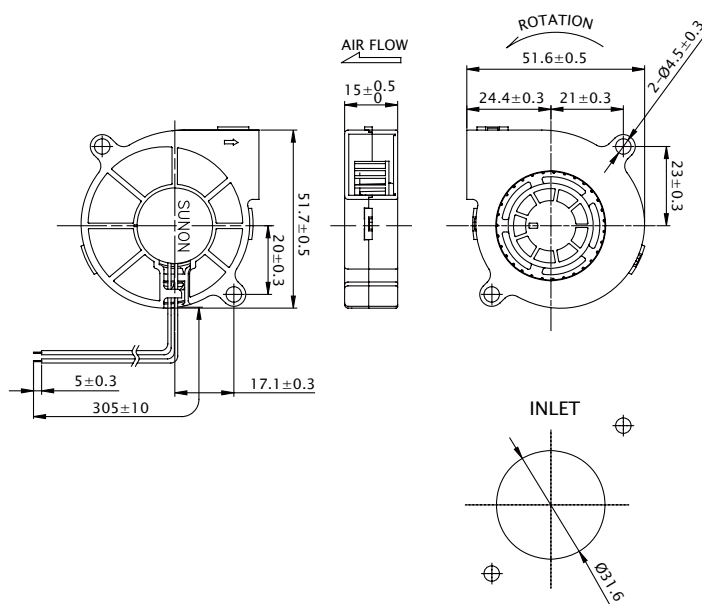


※ All model could be customized. Please contact with Sunon Sales.

※ Specifications are subject to change without notice. Please Visit SUNON website at www.sunon.com for update information.

■ RD / FG Output Signal

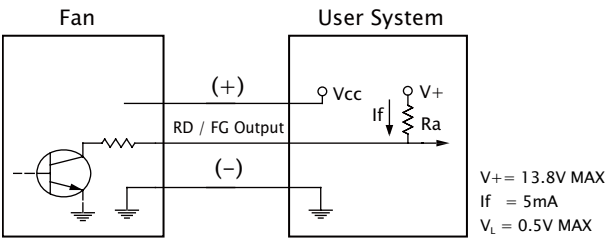

[RD Signal]

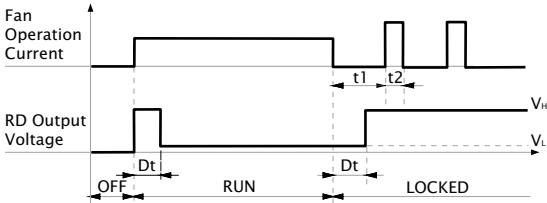

[FG Signal]

